



Fast delivery!

Direct delivery available for all large tanks.
Small tank range available from your local Dealer.



LINPAC Rotational Mouldings Pty Ltd

81 Frankston Gardens Drive, Carrum Downs 3201, Victoria, Australia
Tel (03) 9775 0310 Dispatch 1800 000 776 Fax (03) 9775 1056
www.tankmasta.com.au sales@tankmasta.com.au
ABN 19 067 462 337

I Installation

Recommended installation guide for aboveground tanks. Please ensure that all points are taken into consideration before accepting delivery of your water tank.


- Ensure that the tank site is flat and level, free from any rocks or stones etc. or any other foreign matter that may damage the tank base.
- If fill is used to prepare or level site, ensure that the surface is well compacted to eliminate any soft spots.
- Ensure the tank site is at least 600mm larger in diameter than the tank, i.e. tank diameter 3.7m, tank site 4.3m.
- Ensure a flexible connection at least 300mm in length is fitted between the tank outlet valve and the down stream piping.
- Tie down and secure tank on delivery either by tying down with rope or putting at least 100mm of water in bottom.
- Tank outlets must not be subjected to any extra force, e.g. over tightened.
- Overflow must be piped away from base (see diagram).
- The number of inlet pipes, their sizes and capacities must equal the number of overflow pipes, their sizes and capacities (see diagram).
- Do not allow tank site to deteriorate after installation due to any form of erosion or site destruction caused by vermin such as rabbits and cane toads etc.
- If the tank is partially sunk in the ground, ensure the tank base is buried no more than 600mm below ground level.
- Upright storage tanks must be supported on a site that adequately supports the bottom of the tank.

T The final word

A signed delivery docket confirms that you the customer have received your tank and associated fittings. If you have any concerns or queries, please note them on the delivery docket before signing, because your signature confirms that all the goods on the delivery docket have been received in good order and condition.

The last page of this brochure is a "Customer Feedback Form". This form is an important part of Tankmasta's internal evaluation of our procedures and our level of customer service. We would greatly appreciate that once ordering and after delivery of your Tankmasta® product, if you would take the time to complete and return this survey form to Tankmasta, PO Box 2323, Carrum Downs Vic. 3201.

F Fittings diagram

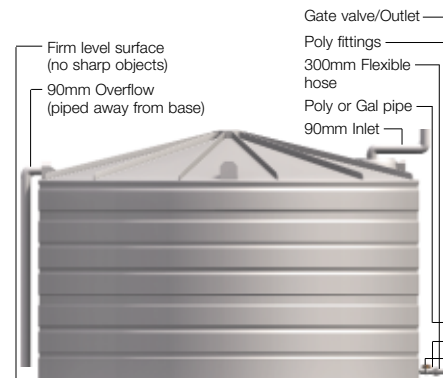

TANKMASTA®

Rainwater Systems

Site access
and you.



